


120 TON

The Powerhouse

Fabricating Machinery, Inc.
6315 Toronto St.
Dallas, TX, 75212
(214) 688-0472
sales@fabmachine.com

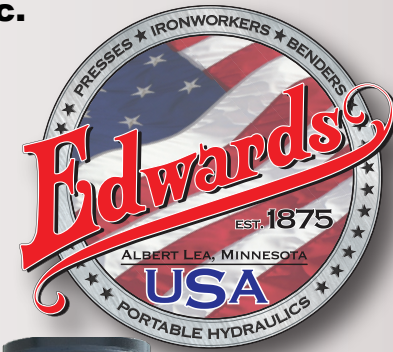

Five Available Workstations
Universal Open Tooling Station
24" Flat Bar Shear
Dedicated Coper Notcher

Electric Stroke Control
ANSI B11.5-1988R(02) Compliant
ETL/UL Approved Controls

Our most powerful Ironworker, the Edwards 120 Ton JAWS Ironworker offers the most in capacity and versatility. Standard features include a Punch Assembly, 24" wide Flat Bar Shear, high capacity Angle Shear, Coper Notcher and a universal open tooling station for optional Tooling Accessories allowing you to select the perfect tool for your needs. Based upon 65,000 psi tensile unless shown otherwise!

PUNCH

Rating: 120 Tons
Max. Capacity: 1-1/2" Dia. in 1" 65,000psi
1-3/16" in 1" 80,000 psi
1-9/16" in 3/4" 80,000 psi
Stroke: 2-1/2"
Throat Depth: 11"
Open Height: 9-1/8"
Shut Height: 7"
Work Height: 36-5/8"

ANGLE SHEAR

Max. Capacity: 6" x 6" x 1/2"
Work Height: 52-1/2"

FLAT BAR SHEAR

Max. Capacity: 1/2" x 24"
1" x 12"
Max. Round: 1-1/4"
Max. Square: 1-1/4"
Work Height: 33-1/4"

COPER NOTCHER

Max. Capacity: 2-1/2" x 6" x 1/2"
Work Height: 40"

OPEN CAVITY

Height: 9"
Width: 11-3/4"
Work Height: 51-3/4"

GENERAL SPECIFICATIONS

Standard Motor: 10 HP 3~ 208 V or 230 V
1770 RPM 26 A
Optional Motors: 10 HP 3~ 460 V
1770 RPM 12 A
10 HP 3~ 575 V
1770 RPM 10 A
10 HP 1~ 230 V
1740 RPM 40 A
Hydraulic Pump: 24 GPM
Valve Pressure: 3800 PSI
Reservoir: 17 Gallons
Cylinder: 2-3/4" Ram

DIMENSIONS

Height: 84"
Width: 60"
Depth: 60"
Shipping Weight: 5500 lb

