

Other Equipment include:



Coilcars



Uncoilers



Shears



**Tension
Stands**



Recoilers



Roll Feeds



**Edge
Trimmers**



**Cut-to-length
& Slitting
Lines**



Trim Line



SCAN ME



Use your smart phone to scan
this and get information on our
company and how to contact us!

GARY MACHINERY LLC
1931 East Main Street
Griffith, IN 46319

Phone: 219/ 980-5700
FAX: 219/ 980-0405

www.GaryMachinery.com

COIL CARS * UNCOILERS * RECOILERS * TURNSTYLES * COIL TIPPERS

Industrial Duty



Sheet Slitters

Dedicated To
Increasing
Customer
Profits &
Productivity



GARY MACHINERY LLC
1931 East Main Street
Griffith, IN 46319

Phone: 219/ 980-5700
FAX: 219/ 980-0405

Slitter Specifications

Industrial Duty Model						
	448	460	548	560	648	660
Overall Width	66"	77 ½"	66"	77 ½"	66"	77 ½"
Overall Depth	30"	30"	30"	30"	30"	30"
Overall Height	43 ½"	43 ½"	50"	50"	50"	50"
Shipping Weight	1300	1600	2200	2500	3000	3300
Max Sheet Width	49 ½"	61 ½"	49 ½"	61 ½"	49 ½"	61 ½"
Pass Line Height	38"	38"	38"	38"	38"	38"
Knife Arbor Diameter	4"	4"	5"	5"	6"	6"
Knife Dimensions	4" x 6" x 1"	4" x 6" x 1"	5" x 7" x 1 ½"	5" x 7" x 1 ½"	6" x 9" x 1 ½"	6" x 9" x 1 ½"
Motor	1 HP	1 HP	3 HP	2 HP	7 ½ HP	5 HP
Speed	80 fpm	80 fpm	100 fpm	100 fpm	100 fpm	100 fpm
Voltage	120V 1 ph. 60 Hz		240/480V 3 ph. 60 Hz			
Standards	Adjustable top arbor penetration via fine-thread screws with connecting chain with a dial indicator, Hand wheel adjustable outboard squaring guide, T-handle Allen wrench, Three sets of knives and rubber stripper ring assemblies, Operating manual		Adjustable top arbor penetration via Jack Screws with a dial indicator, Hand wheel adjustable outboard squaring guide, T-handle Allen wrench, Three sets of knives and rubber stripper ring assemblies, Operating manual			
Options	Extra tooling, Special tooling, Variable speed drives, Centering type entry guides, Passline rolls, Overrunning clutch, Air clutch/brake					


Slitter Capacities

(Number of cuts)

Thickness			MODEL						
			Industrial Duty						
Ga.	In.	Mm.	448	460	548	560	648	660	672
30	.015"	.30	*	*	*	*	*	*	*
28	.018"	.37	*	*	*	*	*	*	*
26	.021"	.45	*	17	*	*	*	*	*
24	.027"	.60	*	13	*	*	*	*	*
22	.033"	.75	15	8	*	19	*	*	*
20	.039"	.91	10	5	*	13	*	*	21
18	.051"	1.2	5	3	13	7	*	19	12
16	.063"	1.5	3	2	8	5	*	12	7
14	.078"	1.8	1		3	2	14	8	5
12	.108"	2.6			1		6	4	2
10	.137"	3.4					2	1	

- Cutting capacity is limited by allowable number of knives on the machine.

Industrial Duty Features

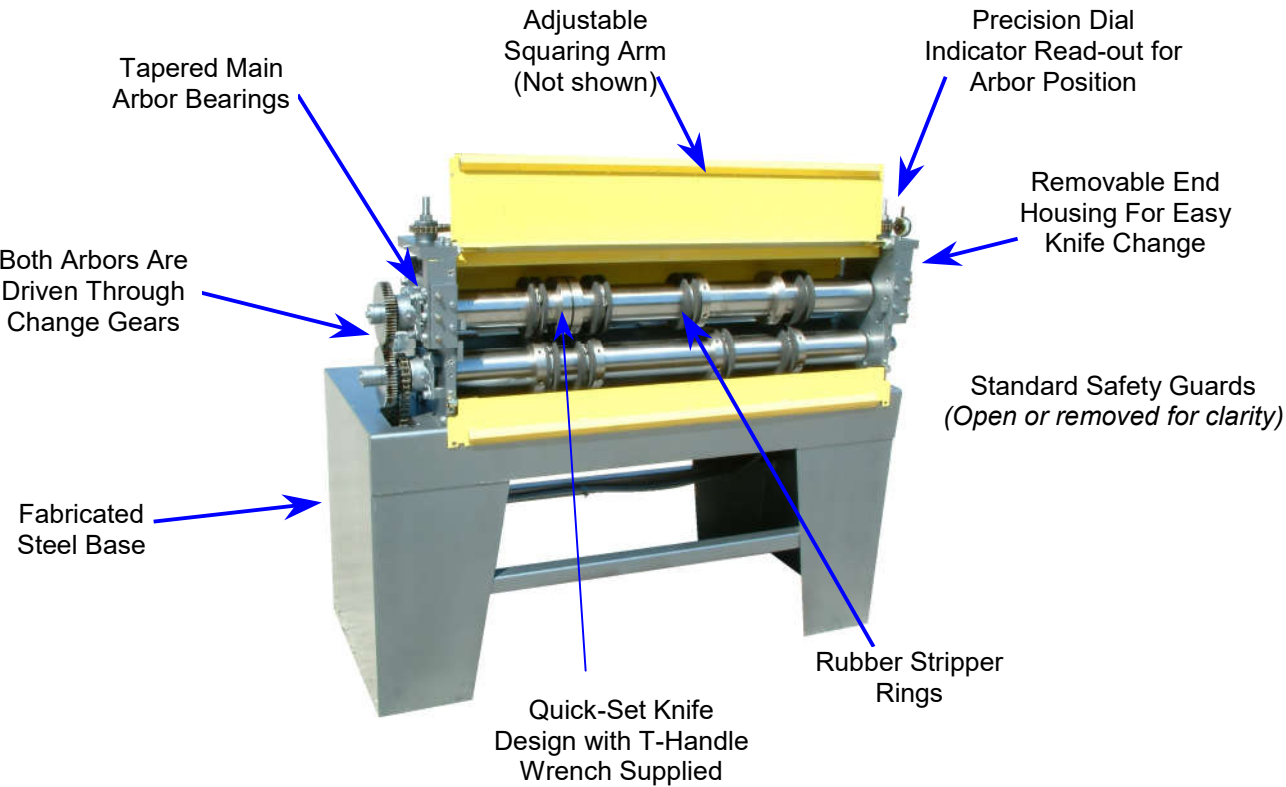

Included, as a standard on the Industrial Duty Slitters is rubber stripper rings to prevent twisting material, scratches, and prevents the material from sticking in between the knives. It also serves to feed the material to assure a straight cut.